




251

PRO FLASH

FLASHING CEMENT

PRODUCT DESCRIPTION:

DEWITT'S PRO FLASH FLASHING CEMENT is an all purpose patching cement manufactured with special blend asphalts, refined oils, mineral stabilizers and reinforced with hi-tech asbestos-free fibers. PRO FLASH FLASHING CEMENT sets up to form a tough, continuous, moisture-proof film that will retain its pliability for a long period of time. This enables it to expand and to conform to movement of other materials.

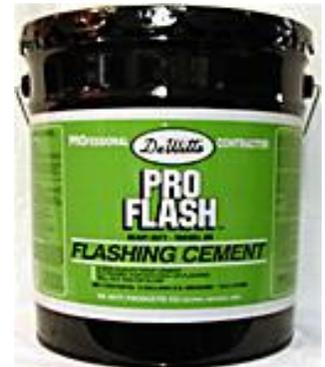

USES:

DEWITT'S PRO FLASH FLASHING CEMENT is an excellent all purpose cement for repairs of all flashings and is ideal for vertical surface application around roofs, parapet walls, chimneys, valleys, pipes and foundations. This plastic roof cement can also be used for repairing leaks in shingles, concrete, metal, or asphalt roofs, down spouts and cornices. Plastic roof cement is excellent for sealing expansion joints and cracks in concrete, brick and as a joint filler for pre cast roof slabs.

APPLICATION:

DEWITT'S PRO FLASH FLASHING CEMENT is used directly from the container. Apply with a trowel or putty knife to surfaces that must be free of dirt, dust and debris. For flashings apply 1/8" to 1/2" thick and trowel it down to a smooth feather edge. On thick applications reinforce area with membrane. For patching, apply PRO FLASH FLASHING CEMENT over area 3/8" x 1/2" thick.

SPECIFICATIONS:

Meets ASTM 4586-86 and Federal Specification SS-C-153C ASTM D-2822 Type I, except this material is asbestos free.

PHYSICAL CHARACTERISTICS:

Weight per gal. (approx)	9 lbs.
Flash point (ASTM 093-52)	100° F Min
Drying time	2-3 days, depending on weather conditions
Viscosity at 80° F	Medium to heavy trowel
Service temperature, extended exposure	-40° to 180° F
Resistance to oils and solvents	Poor
Resistance to sunlight	Excellent
Resistance to chemicals	Excellent
Effects of weathering	Minimal
Water Resistance	
Under draining conditions	Excellent
Under continuous submersion	Fair
Restrictions	Do not use on tar roofs
Clean up	Mineral Spirits or Naphtha
Application temperature	25°-100° F (formulated for seasonal use: summer grade, fall/spring grade, winter grade)

COVERAGE:

One gallon covers approximately 7 sq. ft. at 1/4" thick.

PACKAGING:

55 gal. drum, 5 gal., 3 gal., 1 gal.

CAUTION:

Combustible: Keep away from heat and open flame.
Close container after each use. Keep out of reach of children. Do not induce vomiting. Harmful if swallowed.